

jc714 U.S. PTO



02/22/00

**NEW UTILITY PATENT APPLICATION  
TRANSMITTAL***(Only for new nonprovisional applications under 37 C.F.R. 1.53(b))*Docket No.  
M3477.0000/P011  
Total pages in this  
submissionjc511 U.S. PTO  
09/507466

02/22/00

**TO THE ASSISTANT COMMISSIONER FOR PATENTS****Box Patent Application  
Washington, D.C. 20231**

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

OPTICAL DEVICE, SYSTEM AND METHOD

and invented by:

David R. Brown

**IF A CONTINUATION APPLICATION**, check appropriate box and supply requisite information:☐ Continuation ☐ Divisional☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 14 page(s) and including the following:
  - a. ☒ Descriptive title of the invention
  - b. ☐ Cross references to related applications *(if applicable)*
  - c. ☐ Statement regarding Federally-sponsored research/development *(if applicable)*
  - d. ☐ Reference to microfiche appendix *(if applicable)*
  - e. ☒ Background of the invention
  - f. ☒ Brief summary of the invention
  - g. ☒ Brief description of the drawings *(if drawings filed)*
  - h. ☒ Detailed description
  - i. ☒ Claims as classified below
  - j. ☒ Abstract of the disclosure

**Application Elements (continued)**

3. ☒ Drawing(s) (when necessary as prescribed by 35 U.S.C. 113)  
☐ Formal ☒ Informal Number of sheets: 4
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 C.F.R. 1.63(d) (for continuation/divisional applications only))
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
5. ☐ Incorporation by reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer program in microfiche
7. ☐ Genetic sequence submission (if applicable, all must be included)
- a. ☐ Paper copy
- b. ☐ Computer readable copy
- c. ☐ Statement verifying identical paper and computer readable copies

**Accompanying Application**

8. ☒ Assignment papers (cover sheet & document(s))
9. ☐ 37 C.F.R. 3.73(b) statement (when there is an assignee)
10. ☐ English translation document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certified copy of priority document(s) (if foreign priority is claimed)
15. ☐ Certificate of Mailing  
☐ First Class ☐ Express Mail (Label No.: \_\_\_\_\_ )
16. ☐ Small Entity statement(s) -- # submitted \_\_\_\_\_ (if Small Entity status claimed)

**Accompanying Application (continued)**


- 17.
- ☐
- Additional enclosures (please identify below):

**Fee Calculation and Transmittal**

The filing fee for this utility patent application is calculated and transmitted as follows:

☒ Large Entity ☐ Small Entity

<b><u>CLAIMS AS FILED</u></b>					
For	# Filed	# Allowed	# Extra	Rate	Fee
<b>Total Claims</b>	18	- 20 =		x \$18.00	
<b>Independent Claims</b>	3	- 3 =		x \$78.00	
<b>Multiple Dependent Claims (check if applicable)</b> <input type="checkbox"/>					
<b>Other Fees (specify purpose):</b> Recordation Form Cover Sheet					\$40.00
<b>BASIC FEE</b>					\$690.00
<b>TOTAL FILING FEE</b>					\$730.00

☒ A check in the amount of \$730.00 to cover the total filing fee is enclosed.☒ The Commissioner is hereby authorized to charge and Deposit Account No. 4 - 1073 as described below. A duplicate copy of this sheet is enclosed.☐ Charge the amount of \_\_\_\_\_ as filing fee.☒ Credit any overpayment.☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.31(b).


Mark J. Thronson

Attorney Reg. No.: 33,082

Dickstein Shapiro Morin &amp; Oshinsky LLP

2101 L Street NW

Washington, DC 20037-1526

(202) 785-9700

Dated: February 22, 2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR U.S. LETTERS PATENT

Title: OPTICAL DEVICE, SYSTEM AND METHOD

Inventor: David R. Brown

Dickstein Shapiro Morin  
& Oshinsky LLP  
2101 L Street, N.W.  
Washington, D.C. 20037

(202) 785-9700

## FIELD OF THE INVENTION

The present invention relates generally to optics and optical systems and devices. The present invention also relates to a device for forming an homogenized light pattern. The present invention also relates to a method of making an optical device.

## BACKGROUND OF THE INVENTION

Known techniques for homogenizing light make use of arrayed micro-lenses, diffractive diffusers, ground glass diffusers, and holographically-generated diffusers. Micro-lens arrays homogenize light by creating an array of overlapping diverging cones of light. Each cone originates from a respective micro-lens and diverges beyond the focal spot of the lens. In the known arrays, the individual lenses are identical to each other. Ground glass diffusers are formed by grinding glass with an abrasive material to generate a light-scattering structure in the glass surface.

Micro-lens arrays, ground glass diffusers and holographic diffusers all have the disadvantage of not being able to control the angular spread of the homogenized, diverging light. Light in general has an angular spread that is fairly uniform over a desired angular region, but the boundaries of the angular region are blurred. With the known diffuser methods, the energy roll-off at the edge of the desired angular spread can extend well beyond this region.

Diffractive diffusers can be used to control the angular spread of the output light, but such diffusers are limited with respect to the amount of spread that they can impart to the output light. Due to fabrication limitations for short wavelength sources, visible or below, and limitations in the physics of the structures for longer wavelengths the maximum angular spread is limited. Further, diffractive diffusers used in their traditional binary form can include a significant amount of background energy and the patterns must be symmetric about the optical axis.

Thus, there is a need for a device which can homogenize light while controlling a broad angular spread of the homogenized, diverging light beam. Additionally, there is a need for a method of making an improved device for homogenizing light.

5

## SUMMARY OF THE INVENTION

The disadvantages of the prior art are overcome to a great extent by the present invention. The present invention relates to an optical device formed of a plurality of optical elements. The elements may be used to direct portions of an incident light beam in predetermined, respective directions. The optical elements may be formed adjacent to each other in a two-dimensional array. Adjacent elements may have different shapes. The locations of the elements in the array may be essentially random with respect to the directions of the corresponding light beam portions.

10  
15

According to preferred embodiments of the invention, the optical elements may be formed of transparent or reflective materials. The output surfaces of the respective elements may be flat and planar or they may be curved and non-planar.

20

According to another aspect of the invention, the optical device may be used to form an angular pattern. Alternatively, the device may be used to split the incoming beam into sub-beams.

25

The present invention also relates to an optical system that has a light source and an optical homogenizing device. The optical device may be formed of a large number of micro-wedges. The wedges may be used to form respective non-adjacent portions of a desired angular pattern. In a preferred embodiment of the invention, adjacent wedges may be formed with different three-dimensional configurations.

30

The present invention also relates to a method of making a multi-faceted optical device. The method includes the steps of (1) dividing an angular pattern into sub-angular regions, (2) determining micro-wedge configurations for directing beam

portions to the sub-angular regions, and (3) generating an array of micro-wedges according to the determined configurations, such that adjacent wedges have different configurations.

5           According to another aspect of the invention, the two-dimensional arrangement or ordering of the wedges in the device array is essentially random with respect to the two-dimensional arrangement of the sub-angular regions in the pattern. According to this aspect of the invention, the respective micro-wedge configurations may be assigned to random locations in the array. Thus, the relative positions or order  
10       of the wedges in the array has essentially no relationship to the relative positions or order of the sub-angular regions in the pattern. According to yet another aspect of the invention, the output surface slopes for the micro-wedges are calculated by a programmed general-purpose computer based on the locations of the respective sub-  
15       angular regions in the desired pattern.

          In a preferred embodiment of the invention, appropriate phase tare surfaces may be used to divide the output surfaces of the micro-wedges into stepped or terraced surfaces, to thereby reduce the overall thickness of the optical device.

20           According to yet another aspect of the invention, an optical homogenizing device is formed of a tiled array of sub-devices, where each sub-device has randomly arranged micro-wedges. The tiled device may be used, for example, to handle large diameter input beams.

25           Thus, the present invention provides a method and apparatus for homogenizing a beam of light. The invention makes use of micro-structures in an array where each optical element or micro-wedge is different from its adjacent neighbor in size and slope. The array of different micro-wedges can homogenize light sources without the disadvantages of the prior art. Various combinations and alterations to the  
30       micro-wedge array may include: adding a phase bias to the micro-wedges to further scramble the incoming beam; and adding a lens function to the surface of the array or to the back surface of the device.

The present invention may be used to homogenize light sources, perform beam splitting operations, and/or to redirect light in a given direction.

These and other advantages and features of the invention will become apparent from the following detailed description of the invention which is provided in conjunction with the accompanying drawings.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic perspective view of an optical system constructed in accordance with a preferred embodiment of the invention.

FIG. 2 is a partial plan view of the optical device shown in FIG. 1.

FIG. 3 is a cross sectional view of the optical device of FIG. 3, taken along the line 3-3.

FIG. 4 illustrates a method of making the optical device of FIGS. 2 and 3.

FIG. 5 is a perspective view of another optical device constructed in accordance with the present invention.

FIG. 6 is a partial cross sectional view of yet another optical device constructed in accordance with the present invention.

FIG. 7 is a partial cross sectional view of yet another optical device constructed in accordance with the present invention.

### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Referring now to the drawings, where like reference numerals designate like elements, there is shown in FIG. 1 an optical system 10 constructed in accordance with



a preferred embodiment of the invention. The optical system 10 has a light source 12 for generating a light beam 14, and an optical device 16 for homogenizing the beam 14. In operation, the device 16 may be used to form an angular pattern 18. In the illustrated embodiment, the pattern constitutes the letter "H." In alternative  
5 embodiments, the device 16 may be used to form a wide variety of patterns, including for example a split beam pattern.

In a preferred embodiment of the invention, the optical device 16 is formed of an array of optical wedges 22, 24. The wedges 22, 24 receive incident portions of  
10 the input beam 14 and direct the beam portions 46, 48 toward respective portions 50, 52 of the angular pattern 18.

As shown in more detail in FIG. 2, the optical device 16 may be formed of numerous square or rectangular-shaped micro-wedges 22, 24, 26, 28, 30, 32, 34, 36,  
15 38, 40, 42, 44. Although only twelve wedges 22-44 are shown in FIG. 2, the optical device 16 may have ten thousand or more wedges 22-44 distributed randomly across its output surface. The configuration (i.e., three-dimensional shape) and slope of each wedge 22-44 may be different than the configuration and slope of each adjacent wedge 22-44. In a preferred embodiment of the invention, the wedges 22-44 have flat, planar  
20 optical output surfaces (FIG. 3). The present invention should not be limited, however, to the preferred embodiments shown and described herein in detail.

In a preferred embodiment of the invention, the areas of adjacent wedges 22-44 are made unequal by selecting the lengths of the edges 142 appropriately. As  
25 shown in FIG. 2, for example, the lengths L1 and L2 of edges (or boundaries) 142 extending in a first direction may be made not equal to each other ( $L1 \neq L2$ ). Similarly, the lengths L3 and L4 of edges 142 that extend in the orthogonal direction may be made not equal to each other ( $L3 \neq L4$ ). By constructing the wedges 22-44 in  
30 different sizes by making their side edges 142 of different lengths, interference effects may be reduced.

The arrows 60 in FIG. 2 represent the direction of increasing thickness for the respective wedges 22-44 (where thickness is measured in a direction perpendicular to the plane of the page). Thus, the first wedge 22 increases in thickness from left to right in FIG. 2, whereas the second wedge 24 increases in thickness from top to bottom as viewed in FIG. 2. A third wedge 26 increases in thickness in a direction toward the lower left corner of FIG. 2. A fourth wedge 32 increases in thickness in a direction toward the upper left corner of FIG. 2.

Phase tare surfaces 70, 72, 74, 76, 78, 80, 82, 84 may be provided to reduce the overall thickness of the optical device 16. Thus, the first wedge 22 is separated by a tare surface 70 into first and second portions 90, 92. The slopes (60) of the first and second portions 90, 92 may be equal to each other. That is, the planar output surfaces of the first and second portions 90, 92 may be parallel to each other. Likewise, the second wedge 24 is separated by a tare surface 72 into first and second parallel portions 94, 96. The slopes (designated by arrows 60) of the two portions 94, 96 may be equal to each other.

The tare surfaces 70-84 in effect operate to fold the output surfaces of the micro-wedges 22-44. The tare surfaces 70-84 may be especially useful when the slopes (60) of the wedge output surfaces are relatively great. The heights of the tare surfaces 70-84 (measured in the direction from top to bottom as viewed in FIG. 3) may be a function of the wavelength of the incident light, if desired. For example, the heights of the tare surfaces 70-84 may be integer multiples of the wavelength of the incoming light beam 14.

As shown in FIG. 3, the phase tare surfaces 70-84 may lie in planes that are essentially parallel to the propagation direction of the input beam 14. In FIG. 3, the surfaces of the micro-wedges located behind the cross sectional line 3-3 are not shown for the sake of clarity of illustration. In other words, FIG. 3 represents only a thin slice of the optical device 16 taken along the line 3-3.

In operation, the light source 12 transmits the input beam 14 toward the optical device 16. The input beam 14 may have an uneven intensity distribution across its cross section. The beam 14 is directed onto the optical device 16 such that portions of the beam 14 are incident on respective wedges 22-44. The wedges 22-44 direct the beam portions 46, 48 in predetermined directions to form an homogenized angular pattern 18. The homogenized pattern 18 may have a substantially uniform light intensity distribution. The beam portions 46, 48 are transmitted in different directions since each wedge 22-44 is different from its adjacent and neighboring wedges 22-44 in size and/or slope (60). Thus, the light output 46, 48 of each wedge 22-44 is directed or angled toward a particular sub-angular region 50, 52 of the desired angular spread 18. Although the angular spread or pattern 18 is shown as the letter "H" in FIG. 1, the optical device 16 also may be used to split the input light beam 14 and/or to form a variety of other patterns.

Referring now to FIG. 4, a preferred method of making the optical device 16 includes the step of dividing the desired pattern 18 into small sub-angular regions (Step 150). The size of the incident beam 14 may be used to determine an appropriate number of sub-angular regions into which the pattern 18 should be divided. If the cross sectional area of the beam 14 is relatively large, then a relatively large number of sub-angular regions may be employed. If the cross sectional area of the beam 14 is relatively small, then a relatively small number of sub-angular regions may be employed. Although only two sub-angular regions 50, 52 are shown in FIG. 1 for the sake of clarity, the present invention may be practiced by dividing the entire pattern 18 into ten thousand or more such sub-angular regions. The number of sub-angular regions may be related to the number of wedges to be formed in the optical device 16.

Then, using appropriate geometric calculations, a slope and a three dimensional configuration for each wedge is determined such that the wedge will direct a portion of the input beam to a respective sub-angular region (Step 152). Then, a location within the device 16 is randomly chosen for each calculated wedge configuration (Step 154). The random placement of the wedges 22-44 in the optical

device 16 causes the pattern 18 to have a uniform intensity. In other words, the random location of the wedges 22-44 causes the input beam 14 to be homogenized.

5 The output surfaces of the wedges 22-44 may then be formed in a suitable substrate (e.g., glass) by gray scale photolithography, a suitable direct write method (e.g., electron beam or laser), or by another suitable technique (Step 156).

10 If the number of sub-angular regions in the pattern 18 is less than the number of micro-wedges desired to be arrayed in the device 16, then some of the wedges may have the same slope and size. The similar wedges will direct light energy to the same location or sub-angular region. However, the wedges with similar slopes, sizes and shapes are preferably not located adjacent one another.

15 The illustrated optical device 16 may be used to increase the amount of angular spread in the pattern 18 while maintaining a well defined pattern boundary 158 (FIG. 1). For example, at a wavelength of two hundred forty eight nanometers, with efficiencies of from eighty five percent to ninety five percent, depending on the shape of the output pattern 18, a half angle of approximately seven degrees is obtainable.

20 In addition, the device 16 may be used efficiently over a broad wavelength band, including but not limited to white light. This is an advantage over diffractive diffusers since diffractive diffusers are tuned to a particular wavelength and have decreased efficiency at different wavelengths.

25 According to another embodiment of the invention, an optical device 100 (FIG. 5) may be formed of a tiled array of smaller devices 16. The tiled device 100 may be used, for example, to handle large diameter input beams. The size of each tile 16 may be slightly different from the neighboring tiles 16 to eliminate interference effects that might otherwise be caused by a repeating pattern. The intensity of light  
30 transmitted through each tile 16 may be different, which may cause a slight change in the amount of energy imparted to each sub-angular region in the pattern 18. This effect is reduced, however, by the random placement of wedges within each tile 16.

For certain desired angular regions, the number of sub-angular regions required to fill the region can be very large (for example, greater than ten thousand) which requires a very large number of micro-wedges. In these instances, the input beam 14 should have a small diameter to illuminate all portions of the tiles 16. By decreasing the size of the individual micro-wedges, the input beam size can be reduced. The size of the wedges 22-44 preferably should not be so small, however, as to cause the diffraction angle defined by the wedge apertures to become too great.

As shown in FIG. 6, the output surfaces 130 of an optical device 16' may have slight curvatures. The surfaces 130 may be spherical, parabolic or the like. The output surfaces 130 may be separated by tare surfaces and discontinuities 132 similar to the tare surfaces and rectangular facet boundaries shown in FIGS. 2 and 3. The slight curvatures shown in FIG. 6 produce narrow bands of angles instead of single angles. The illustrated curvatures can help to improve the filling of large angular patterns 18 with fewer facets in the optical device 16'. The embodiment shown in FIG. 6 otherwise operates similarly to the embodiment shown in FIGS. 1-3.

FIG. 7 displays an optical device 16'' employed in a reflection mode. In this embodiment, the input light 14 is propagated into a micro-wedge array 16''. A mirror coating 122 is used on the array output surfaces which reflects the input light 14 to direct beam portions 46', 48' toward the respective portions of the desired pattern 18.

The present invention may also be employed with a phase bias device or an optical lens 140 as shown schematically in FIG. 1. The lens 140 may be separate from the optical device 16 or it may be constructed as an integral part of the optical device 16. The lens 140 may be on either side of the micro-wedges 22-44. The lens 140 may be used, for example, to perform an optical Fourier-transform operation.

According to yet another aspect of the invention, the facet boundaries 142 (FIG. 2) of each micro-wedge 22-44 may be randomized to further reduce the effects of discontinuities at the boundaries 142.

Reference has been made to preferred embodiments in describing the invention. However, additions, deletions, substitutions, or other modifications which would fall within the scope of the invention defined in the claims may be implemented by those skilled in the art without departing from the spirit or scope of the invention. Accordingly, the invention is not to be considered as limited by the foregoing description, but is only limited by the scope of the appended claims.

What is claimed as new and desired to be protected by Letters Patent of the United States is:

1. An optical device, comprising:

a first optical element for directing a first portion of an incident light beam in a predetermined first direction; and

a second optical element for directing a second portion of said incident light beam in a predetermined second direction, said second direction being different than said first direction, said second optical element being adjacent said first optical element, and wherein the shape of said second optical element is different than the shape of said first optical element.

2. The device of claim 1, wherein said optical elements are transparent.

3. The device of claim 1, wherein said optical elements are reflective.

4. The device of claim 1, wherein said optical elements include micro-wedges with planar output surfaces.

5. The device of claim 1, wherein said optical elements include non-planar output surfaces.

6. The device of claim 1, further comprising a lens for performing a Fourier transform operation.

7. The device of claim 1, further comprising a device for optically modifying said incident light beam.

8. The device of claim 1, wherein said optical elements are arranged to split the incident light beam.

9. An optical system, comprising:

a light source for providing a light beam; and

an optical device for homogenizing said beam, said optical device including adjacent optical elements for forming respective non-adjacent portions of an angular

pattern, and wherein said optical elements have different three-dimensional configurations.

10. The system of claim 9, wherein said device is transparent.

11. The system of claim 10, wherein said optical elements include planar output surfaces.

12. A method of making an optical device, said method comprising the steps of:

dividing an angular pattern into a plurality of sub-angular regions;

determining micro-wedge configurations for directing light to said sub-angular regions; and

subsequently, generating an array of micro-wedges according to said micro-wedge configurations, such that adjacent micro-wedges in said array have different configurations.

13. The method of claim 12, wherein the two-dimensional arrangement of said micro-wedges in said array is essentially random with respect to the two-dimensional arrangement of said sub-angular regions of said pattern.

14. The method of claim 13, further comprising the step of assigning said micro-wedge configurations to random locations in said array.

15. The method of claim 14, wherein said determining step includes the step of calculating output surface slopes for said micro-wedges.

16. The method of claim 15, wherein said step of generating said array includes the step of forming phase tare surfaces in said micro-wedges.

17. The method of claim 16, wherein said generating step includes the step of forming output surfaces for said micro-wedges.



18. The method of claim 12, further comprising the step of providing a plurality of tiles of said micro-wedge arrays.

1109712 v1 NS9C011.DOC

## ABSTRACT

An optical device is formed of an array of micro-wedges where each micro-wedge is different in size and shape from adjacent micro-wedges. Each micro-wedge of the array directs light in a predetermined direction toward a particular sub-region of an angular pattern. The positions of the micro-wedges in the device may be essentially random with respect to the corresponding positions of the sub-regions. The device causes the output light to fill a large angular spread with homogenized light with clear boundaries and edges. The device employs refraction or reflection, and the device operates efficiently over a broad wavelength band.

1109712 v1 NSC011 DOC



Fig. 4

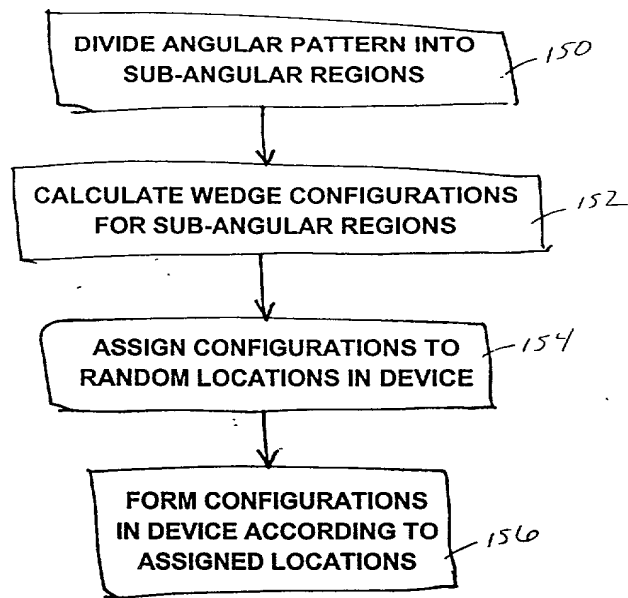


Fig. 5

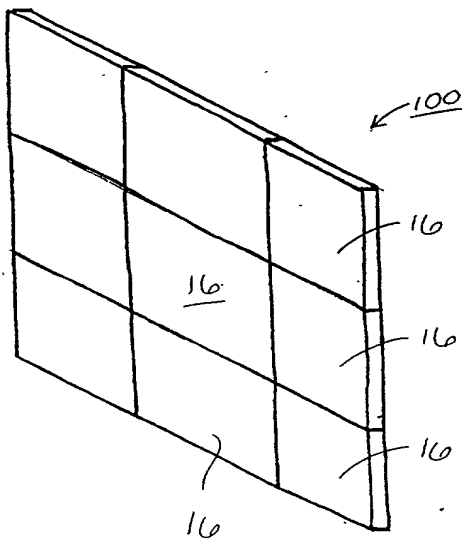


Fig. 6


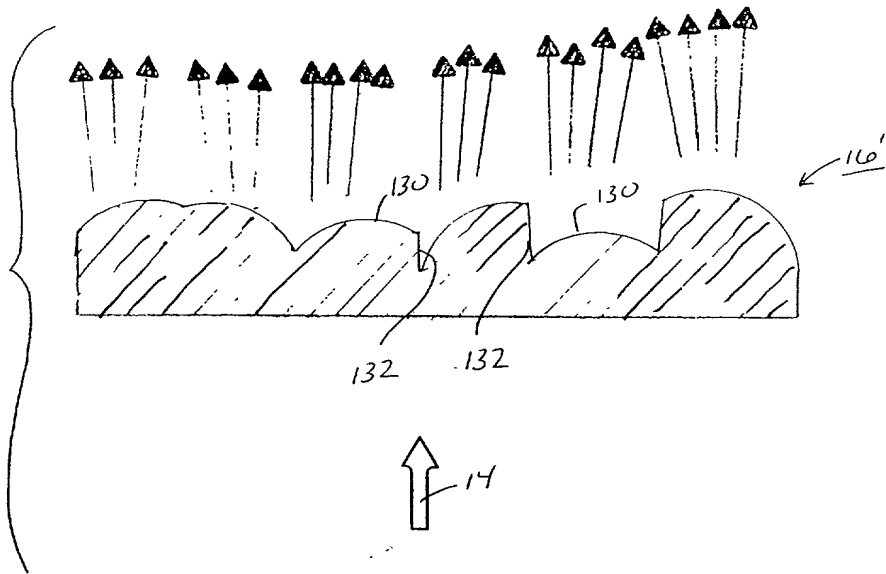


Fig. 7

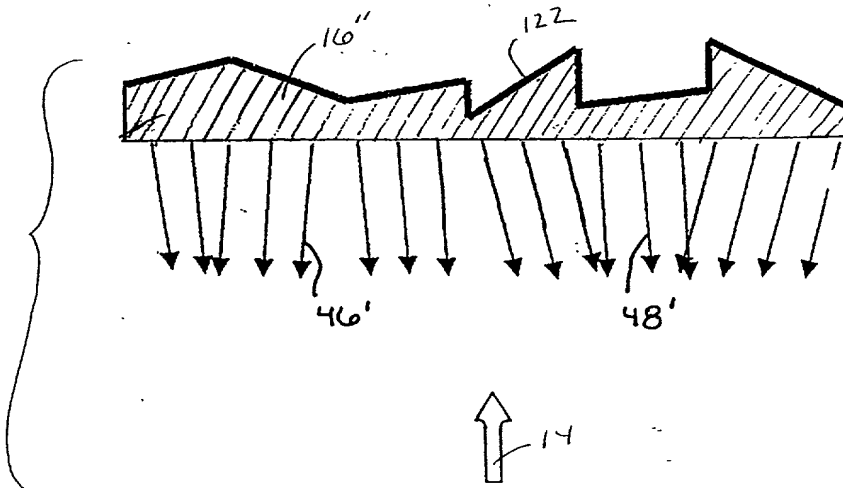

Docket No.

M3477.0000

## Declaration and Power of Attorney for Patent Application

### English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

OPTICAL DEVICE, SYSTEM AND METHOD

the specification of which (check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_  
as United States Application No. or PCT International Application No. \_\_\_\_\_  
and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign applications(s) for patent or inventor's certificate, or Section 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not  
Claimed

\_\_\_\_\_  
(Number) (Country) (Filing Date)

☐

\_\_\_\_\_  
(Number) (Country) (Filing Date)

☐

\_\_\_\_\_  
(Number) (Country) (Filing Date)

☐

PATENT Docket No.: M3477.0000  
Serial No.: Not Yet Assigned

Page 2

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

_____ (Application Serial No.)	_____ (Filing Date)
_____ (Application Serial No.)	_____ (Filing Date)
_____ (Application Serial No.)	_____ (Filing Date)

I hereby claim the benefit under 35 U.S.C. Section 120 of any United States application(s), or Section 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. Section 112. I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C.F.R., Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)
_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)
_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

PATENT Docket No.: M3477.0000  
Serial No.: Not Yet Assigned

Page 3


**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Gary M. Hoffman, 26,411; Thomas J. D'Amico, 28,371; Donald A. Gregory, 28,954; James W. Brady Jr., 32,115; Jon D. Grossman, 32,699; Mark J. Thronson, 33,082; Jeremy A. Cubert, 40,399; Laurence E. Fisher, 37,131; Brian A. Lemm, 43,748; Gianni Minutoli, 41,198; Edwin Oh, P-45,319; Eric Oliver, 35,307; William E. Powell III, 39,803; Paul L. Ratcliffe, 45,290; Mark E. Strickland, 45,138 and Salvatore P. Tamburo, P-45,153.

Send Correspondence to:

Mark J. Thronson  
Dickstein Shapiro Morin & Oshinsky LLP  
2101 L Street NW  
Washington, DC 20037-1526

Direct Telephone Calls to: 202-775-4742

Full name of sole or first inventor	
David R. Brown	
Sole or first inventor's signature	Date
	X 2/18/00
Residence	
Meridianville, Alabama	
Citizenship United States of America	
Post Office Address	
216 Constitution Drive Meridianville, Alabama 35759	

Full name of second inventor	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	